



Extended Discharge


The Extended Discharge is a new option for the XM-1 Friction Feeder. The unit is mechanically driven by the XM-1 Friction Feeder.

The Extended Discharge is ideal for;

- Feeding into obstructed areas
- Top and/or bottom reading of barcodes, UPC codes, and more
- Blow on labeling
- And more...

The robust design matches that of the XM-1 Feeder for long lasting durable performance. With our innovative "self-adjusting" hold down assembly, set up of the Extended Discharge is minimal thus maximizing uptime and productivity.

XM-1 Feeder

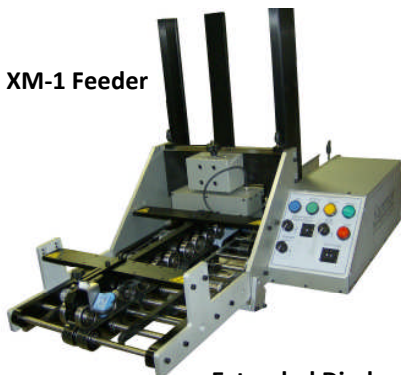

Extended Discharge

Specifications:

Product Size

Min. 2"W x 3" L – Max 12"W x 12"L

Product Thickness

Min. .003" – Max. .750"

12" Length perfect for getting into tight spaces



Superior-PHS

14414 21st Avenue North
Plymouth, MN 55447

Phone: 763-546-9140

Fax: 763-546-8883

E-mail: info@superior-phs.com

Web: www.superior-phs.com



Open Top and Bottom design
perfect for barcode reading and
verification