


## Installing your CX-9 feeder to the Mounting Stand



**IMPORTANT – If you mounting stand was shipped with the feeder rear arm support removed, jump to step 3 and then come back to step 1**

Note: One front feeder mounting bracket will be fixed in place

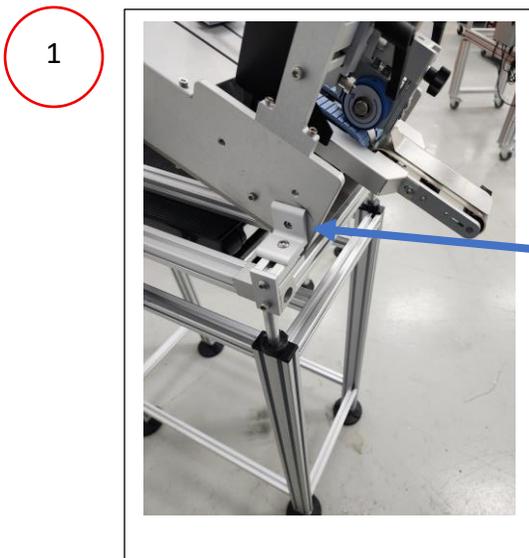

Move feeder into the fixed bracket. The head of the screw will fit in the bracket hole.

2

Next, loosen and move the other front feeder mounting bracket up to the feeder, align the screw head with the hole in the bracket, and tighten.



3

The rear support arm can be adjusted vertically to change the angle of the feeder. In some cases, the rear support arm has been removed for shipping/packaging. If yours was removed, simply loosen the three screws of the mounting brackets, slide the arm into the nuts of the brackets, position the bracket to the desired height, and tighten the screws.



### Final Installation



To adjust the height of the stand, two tools are included. A manual wrench and a socket that can be put on a drill.


Locate the adjustment screw on the rear of the scissor plate and adjust according to your needs.



Adjustment Screw



Manual Wrench

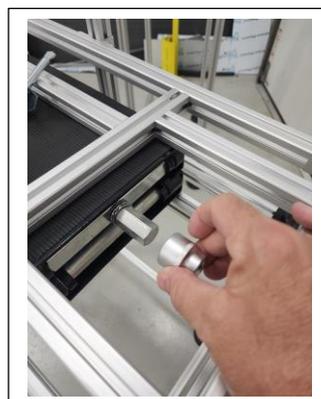

Socket for drill