

### Xtreme Ultra Series Friction Feeders



The Xtreme Ultra Series delivers state-of-the-art technology, performance, and versatility at the best value on the market.

The **Xtreme XM-30 Ultra** features state-of-the-art technology for use in high-speed batch counting applications and wide format feeding. With belt speeds of 750 ft./min., the XM-30u is the fastest feeder on the market today. Use in batch count, one-shot, or continuous run mode for inline use with shrink-wrapping and poly-bagging equipment, or individual offline batch counting.

The XM-30u features top-line servo motor technology with an intuitive touchscreen PLC, push button controls, and tool-less setup adjustments allowing for greater uptime and maximized productivity. Easily mount to a Superior-PHS mounting stand for use throughout your entire production and fulfillment area.

Get more standard operating features with the XM-30u than any other model including:

- *Electro-Mechanical Double Detect*
- *Vacuum Assist Feeding*
- *Rotating Gate*
- *Pause/Resume Function*


The advanced features and dependability of the Xtreme Ultra line make it the peak of feeding technology.



Add a Victory Batch Dropper for up to 30" x 24" batch counting



Up to 30" w one-shot collating

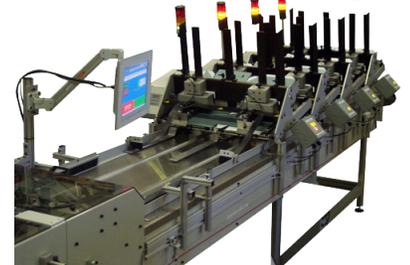

#### FEEDING SOLUTION FOR

Stationary	Poly Bags	Z-Folds
Photo Paper	Calendars	Signatures
Craft paper	Invitations	Bags
Magazines	Paper	Collapsed Cartons
Folded Docs	Brochures	Plastic Cards
Greeting Cards	Die Cuts	Envelopes
Coffee Bags	Blister Cards	Direct Mail
Holiday Cards	Tri-Folds	Corrugate
Chipboard	Forms	Booklets
Leaflets	and much more	

#### APPLICATIONS & INTEGRATIONS

##### Feeding Modes:

- Batch count (up to 99,999 pieces)
- One-Shot / On-Demand
- Continuous

##### Integrate with:

- |                          |                       |
|--------------------------|-----------------------|
| Wrappers                 | Auto L-Bar Sealers    |
| Banders                  | Cartoners             |
| Collator & Kitting Lines | Strappers             |
| Barcode Readers          | Print/Label Systems   |
| Inspection Systems       | Camera/Vision Systems |
| Bundle Stackers          | and much more         |

#### FEATURES & SPECIFICATIONS

<b>Product Sizes*</b>	2"W x 3"L to 30"W x 12"L
<b>Product Thickness</b>	.003" to .750"
<b>Product Stack Height</b>	Up to 20"
<b>Max. Speed</b>	750 ft./min
<b>Footprint Dimensions</b>	40"W x 30"L x 24"H
<b>Weight</b>	130 lbs. (38.56 kg)
<b>Utilities</b>	230vac - 3A - 60Hz

\*Optional lengths up to 27" available. Not recommended for 13.25-16.9"W