

Xtreme XM Series Friction Feeders



The Xtreme XM Series delivers the most robust, versatile, high-performance feeding at the best value on the market, guaranteed.

The Xtreme XM-1 is the flagship model for the Xtreme XM Series. This powerful workhorse delivers 24/7 reliability and consistency for one-shot, on demand, and collating applications as well as batch counting and continuous run applications. Use inline with shrink-wrapping and poly-bagging, or individual offline batch counting.

The XM-1's ease-of-use features push button and thumbwheel controls with tool-less setup adjustments allowing for greater uptime and maximized productivity. Easily mount to a Superior-PHS mounting stand for use throughout your entire production and fulfillment area.


Get more standard operating features with the XM-1 than any other model including:

- Vacuum Assist Feeding
- Rotating Gate
- Pause/Resume Function



Add a XM-1 for Top Sheet & Backer Card Placement

The robust design and dependability of the Xtreme XM lines make it the best value on the market.

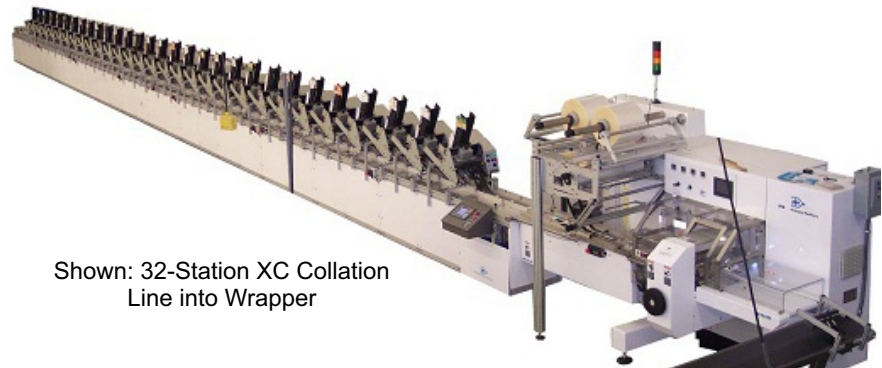

Shown: 32-Station XC Collation Line into Wrapper

FEEDING SOLUTION FOR

Stationary	Poly Bags	Z-Folds
Photo Paper	Calendars	Signatures
Craft paper	Invitations	Bags
Magazines	Paper	Collapsed Cartons
Folded Docs	Brochures	Plastic Cards
Greeting Cards	Die Cuts	Envelopes
Coffee Bags	Blister Cards	Direct Mail
Holiday Cards	Tri-Folds	Corrugate
Chipboard	Forms	Booklets
Leaflets	and much more	

APPLICATIONS & INTEGRATIONS

Feeding Modes:

One-Shot / On-Demand
Batch count (up to 99 pieces)
Continuous

Integrate with:

Wrappers	Auto L-Bar Sealers
Banders	Cartoners
Collator & Kitting Lines	Strappers
Barcode Readers	Print/Label Systems
Inspection Systems	Camera/Vision Systems
Bundle Stackers	and much more

FEATURES & SPECIFICATIONS

Product Sizes*	2"W x 3"L to 12"W x 12"L
Product Thickness	.003" to .750"
Product Stack Height	Up to 20"
Max. Speed	210 ft./min
Footprint Dimensions	21"W x 25"L x 24"H
Weight	85 lbs. (38.56 kg)
Utilities	115/230vac - 6/3A - 50/60Hz

*Optional lengths available